


Camec New 4 Season Hatch

Part No. 039585

Installation Guidelines Ver. 001-2011

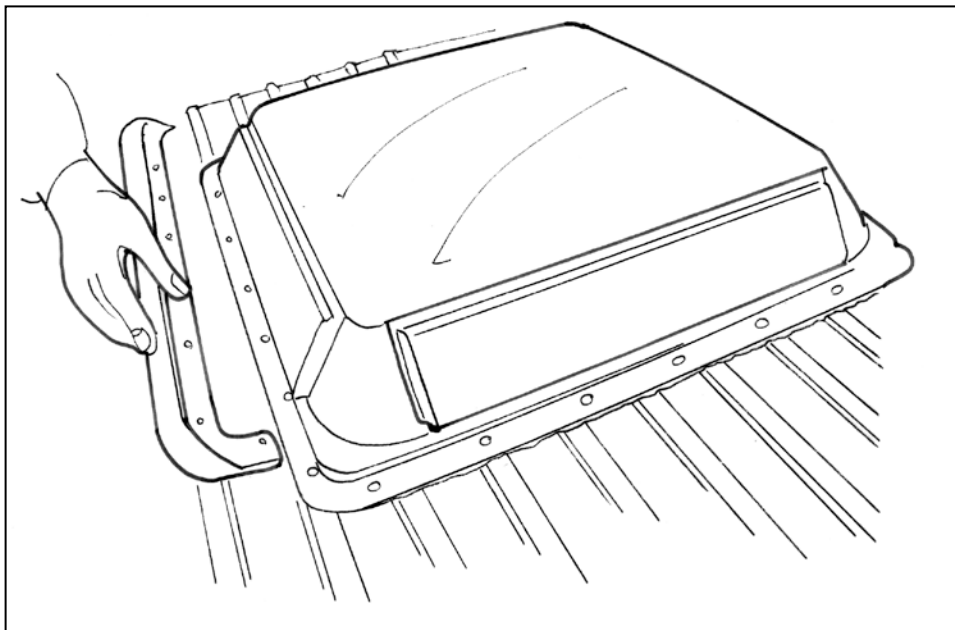

MADE IN AUSTRALIA

CAMEC NEW 4 SEASONS HATCH VERSION 001-2011

More information <https://www.caravansplus.com.au>

MANUAL COMPANION PAGE

Products related to this Installation instructions

Useful CaravansPlus links for parts, accessories, guides and support.


Shop over 8,000 caravan accessories.

Find related products, replacement parts and practical help from CaravansPlus.

8,000+ products

Specialist support


Related products



Camec Four Seasons hatch, White, 660x660mm, with 50mm Internal Trim

TRIM+041398 - The PLASTIC Four Seasons Hatch replaces the older style. Perfect for the modern vehicle. - The complete...more info.

View item



Camec Four Seasons hatch, White, 660x660mm, Without Internal Trim

041398 - The PLASTIC Four Seasons Hatch replaces the older style. Perfect for the modern vehicle. - The outside...more info.


View item

Helpful links




Hatches & Skylights

Shop category



Search Products

Find parts



Guides & Articles

Helpful info



Contact Support

Ask us

Australian-owned • Caravan parts specialists • Australia-wide shipping

<https://www.caravansplus.com.au>

Components Supplied in Carton.

- Hatch
- Deflector*
- Foam tape *
- 28 x self drilling phillips head screws*

NOTE:- ITEMS NOTED * MUST BE USED OR WARRANTY MAY BE VOID.


Tools required

- Power drill
- Neutral cure Silicone sealant (non-Acetic)
- Cleaning/degreasing fluid

The following is a list of all spare parts:


Part No.	Description
040158	CAMEC NEW 4SH FLYSCREEN
040159	CAMEC NEW 4SH OPENING FLAP
040160	CAMEC NEW 4SH WINDER

Step 1:- When framing roof make provision for hatch by providing suitably placed supports to suit a 660mm x 660mm opening +/- 2mm.

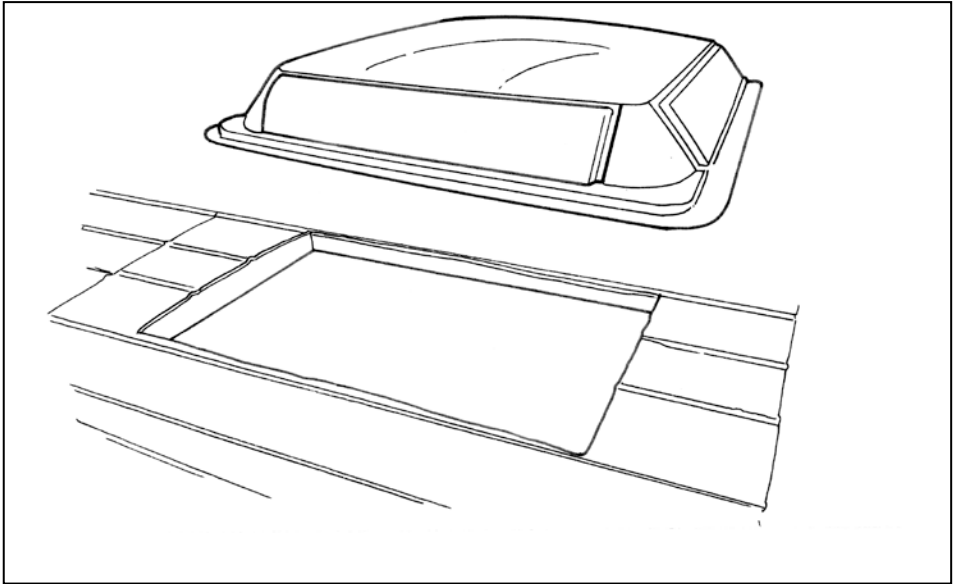


Step 2:- Test fit hatch into cut out area and adjust to suit.


Step 3:- If a seam in the roof sheeting runs under the edges of the hatch, be sure to seal with silicone and flatten so as to avoid water ingress.

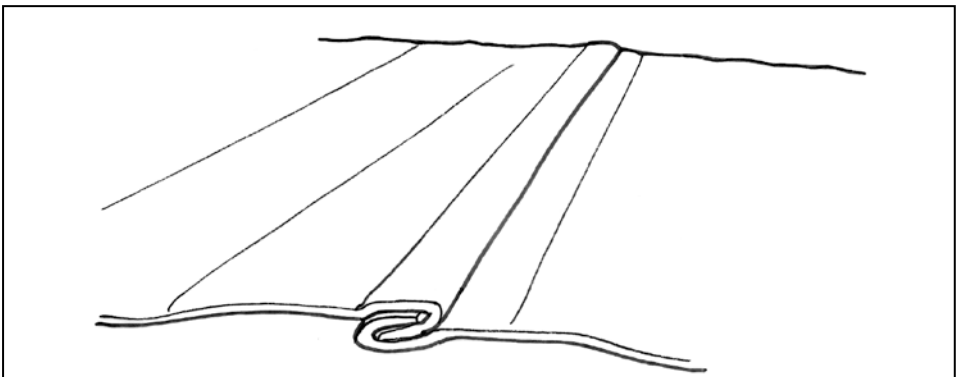


Step 4:- Clean roof surface approx 50mm around edge of the already cut 660mm square hole and around flange periphery, use Isopropanol / Prepsol / Methylated Spirits or similar.

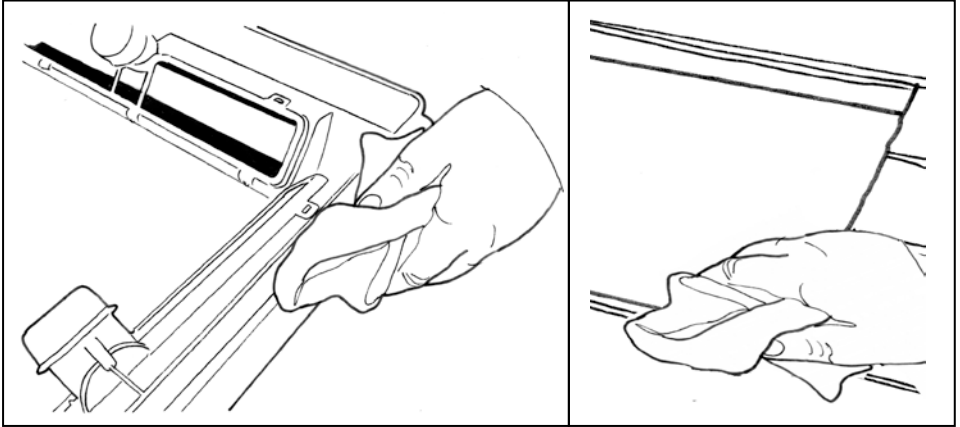


Step 5:- Starting on a side area and not under a screw indent location, fit adhesive side of supplied foam tape to the underside of the hatch flange.

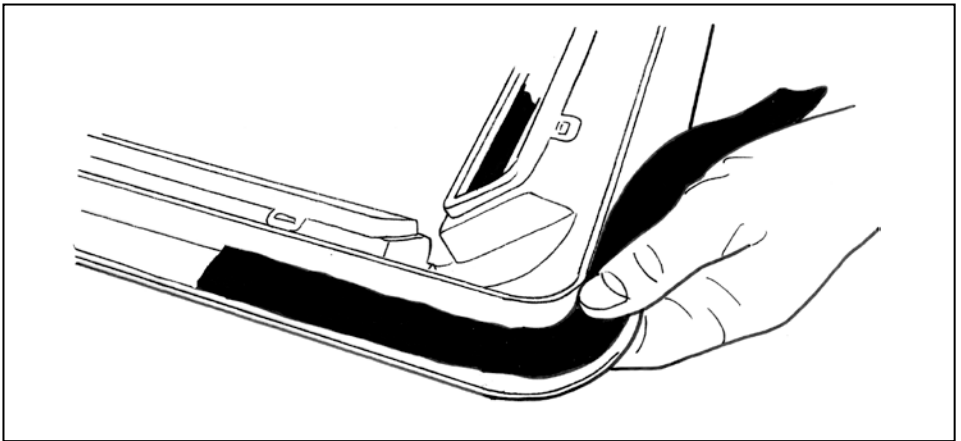


Step 6:- Cut tape to match beginning and apply to create a weather proof join.

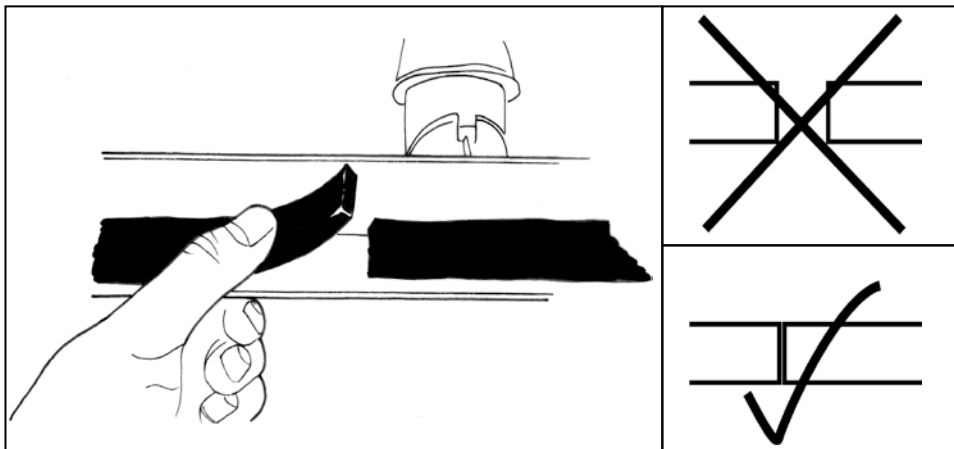

Step 7:- Apply a continuous bead of non-acetic silicone a minimum of 8mm wide to the centre of the foam tape all the way around the hatch.

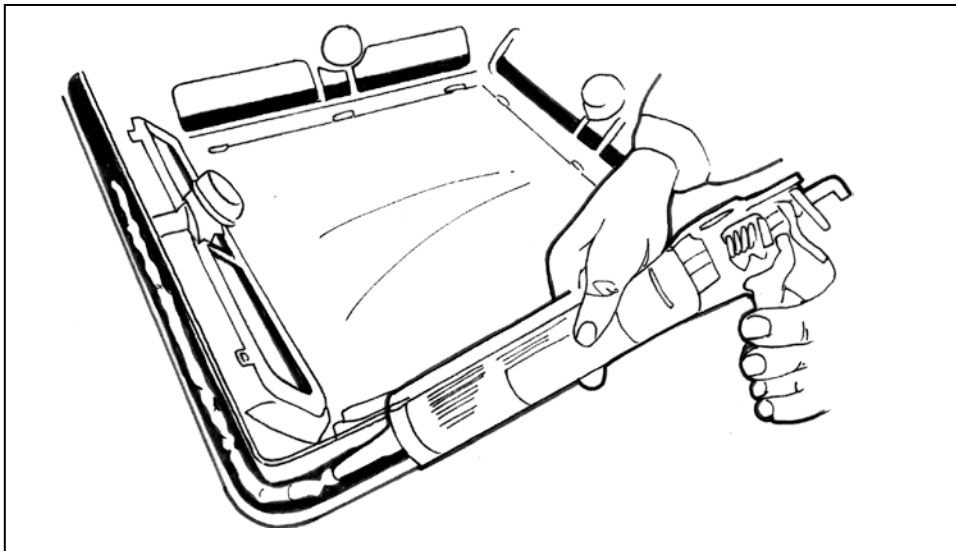


Step 8:- Fit deflector to hatch along front edge (this is relative to vehicle), prior to inserting screws.

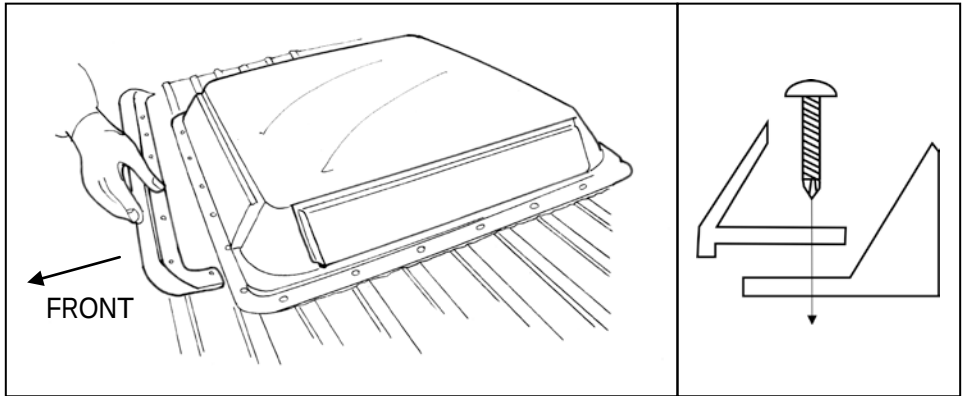

Step 9:- Install each of the 28 supplied self drilling screws initially using lowest torque setting and being careful not to over-tighten.


Note:- torque setting may need to be adjusted to achieve best results.

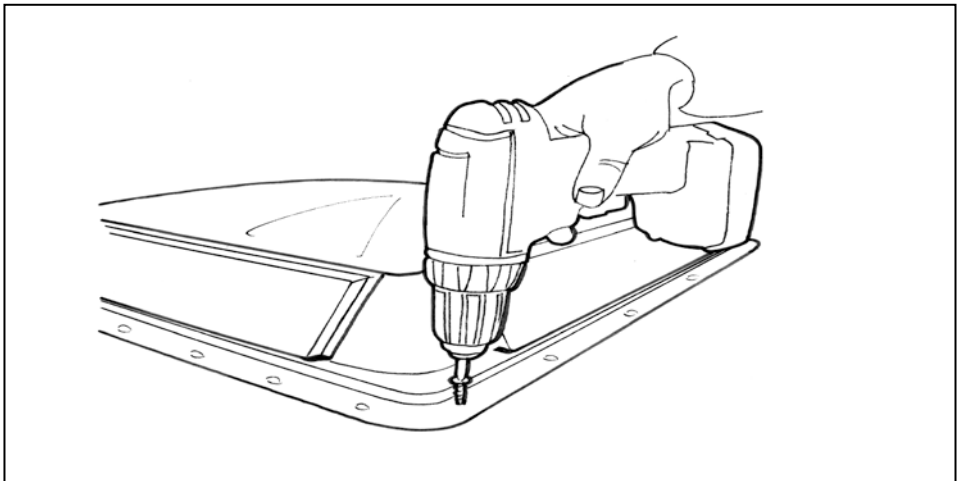

Step 10:- clean any excess silicone and allow to dry.

Camec New 4 Season Hatch

Operating instructions:-

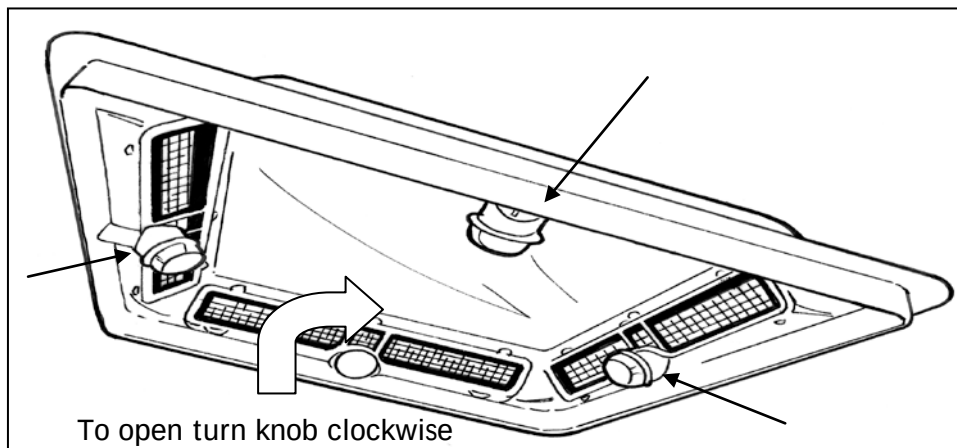

-To open ventilation ports on the hatch, gently twist one of the four knobs clockwise until corresponding flap opens (Anti clockwise to close).


-If cooking with a gas appliance it is recommended that hatch flaps be left open position.

-Care should be taken to ensure flaps are closed before departing and driving away.

WARNING ! The flyscreens must be removed and cleaned regularly to ensure safety of occupants.

Camec New 4 Season Hatch

Removal of the Flyscreens:-

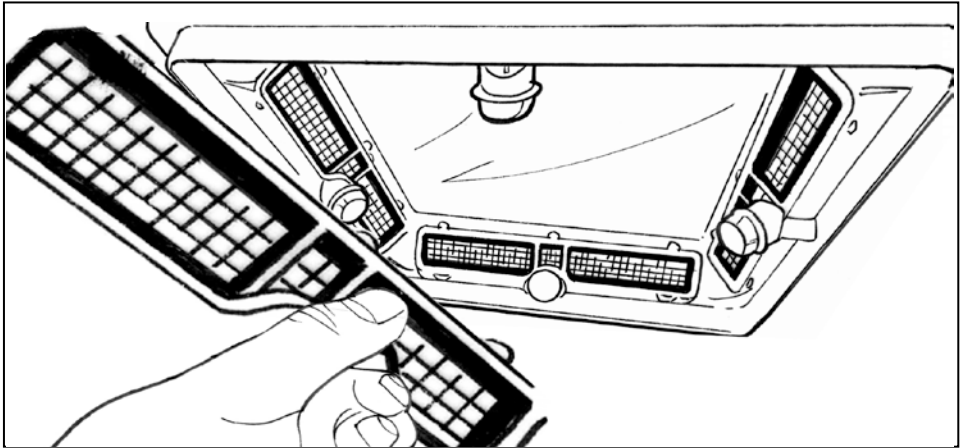

Periodic removal and cleaning of flyscreens is recommended.

Remove flyscreen by holding the bottom of the surround and gently pulling forward and lifting off the top tabs.

Clean the flyscreen thoroughly and replace by locating the top tabs over the bottom tabs and pushing the bottom of the flyscreen into position.

WARNING ! The flyscreens must be removed and cleaned regularly to ensure safety of occupants.